



TECHNICAL FEATURES :  
 Max speed : 6000rpm  
 Max torque : 40Nm  
 Output : FA25.4  
 Coolant : External

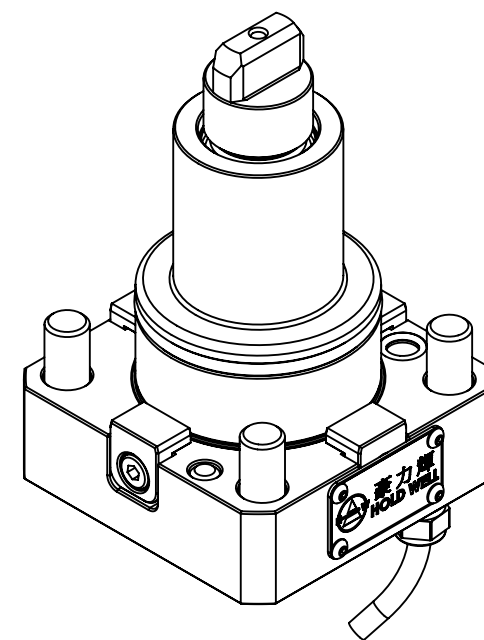

**Machine type :**  
 PUMA 2100/2600/3100 (M,LM,MS,LMS) fiPUMA 300 (M,MS,MB,MC)  
 PUMA MX2000/2500/2600 (T,ST) fiPUMA TT2000/2500 (MS,SY)  
 PUMA V400 (M) fiPUMA VT450 (M,M-2SP)  
 Hyundai WIA L2100/ L2600 (Y/SY) fiSKT250/300 (M,LM)



**豪力輝工業股份有限公司**  
**HOLD WELL INDUSTRIAL CO.,LTD**  
 E-mail : sales@mail.holdwell.com  
<http://www.holdwell.com>

**品號**  
 Model No.  
**品名**  
 Description

**THM-A22-65C**  
**BMT65-FA25.4 軸向動力刀座**  
 BMT65-FA25.4 Axial Driven Tool Holder