

# Oil Skimmer

油水分離機

*Electricity-Free and  
Pneumatically Operated*

免插電、氣動



豪力輝工業股份有限公司  
HOLD WELL INDUSTRIAL CO., LTD.  
台中市大雅區雅環路2段120巷10弄31號  
31, Aly. 10, Ln. 120, Sec. 2, Yahuan Rd., DaYa Dist.,  
Taichung City 42869, Taiwan (R.O.C.)  
sales@mail.holdwell.com



More information  
測試影片



See Test Video  
更多資訊



ISO 9001:2008  
ID 9105040234




HOLD WELL



OS-18L

## Before/After Usage Comparison 使用前後比較

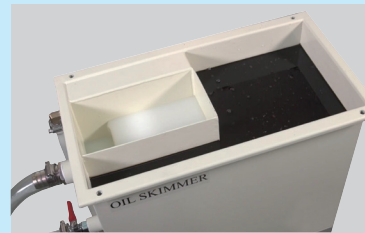

- Special design to defoam.
- No defoamant required.
- 特殊設計，消泡功能
- 不須添加消泡劑

- Special deflecting and filtering design separate oil and water effectively.
- After oil and water separation, the percentage of oil can reach between 90% and 95%.
- 特殊導流過濾設計，油水分離效率高
- 油水分離後，油的比例為 90~95%

- Built-in stainless steel filter
- Easy to wash
- 內置不銹鋼過濾器
- 清洗容易




- Portable with wheel or you may just place it on a trolley.
- 可移動，亦可置於台車上



- No consumable components
- Easy installation.
- No fire risk
- 無耗材
- 安裝容易
- 無火災風險

- Electricity-Free.
- Driven by a small amount of compressed air (3KG/CM<sup>2</sup>).
- 免插電
- 只需小壓力的空壓就能驅動 (3KG/CM<sup>2</sup>)

- The floating ball design is suitable for any size of oil tank.
- Floating model separates oil and water efficiently.
- 浮球設計能適用於任何尺寸的油桶
- 特殊吸油組設計，油水分離效率高

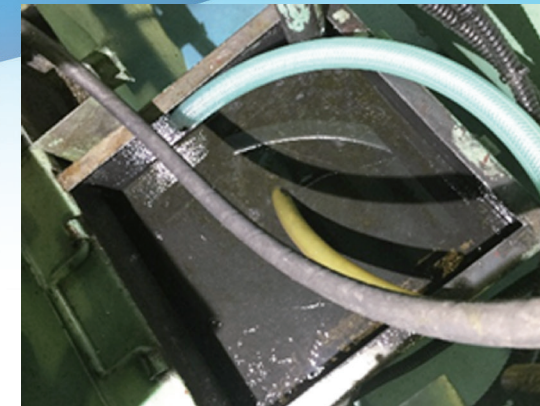

Before : Blackish carbon powder floats on top of water tank.  
Tank volume : approx. 500L  
使用前：水箱上漂浮著黑色碳粉  
水箱容量：約 500L



After : Both carbon powder and oil floats have been removed.  
使用後：碳粉及浮油都已被清除

1 day / 天



Before : Aluminum powder floats on top of water tank.  
Tank volume : approx. 300L  
使用前：水箱上漂浮著鋁粉  
水箱容量：約 300L



After : Most of aluminum powder and oil floats have been removed.  
使用後：大部分的鋁粉及浮油已被清除

1 hour / 小時

### Advantages of OS-18L

- Electricity free; power cost-saving, no public safety issue.
- No extra cost for consumables.
- Efficiently removes impurities like carbon powder, aluminum powder, and etc.
- Significantly improves oil-water separation effectiveness.
- Effectively lower germ growth within the cutting fluid.
- Save considerable costs for both waste oil treatment and cutting fluid replacement.
- 免插電、省電費、不會造成公安問題
- 免消耗品費用
- 可有效去除雜質，如碳粉，鋁粉，等等
- 大幅提升油水分離效率
- 有效減少切削液中的細菌生長
- 節省廢油處理費用及切削液更換費用

### Specifications 規格

Model NO.	Process Flow Rate 處理流量(L/Min.)	Capacity 容量(L)	N. W.	G. W.	Dimensions 尺寸(mm)	Packing Dimensions 包裝尺寸(mm)
OS-18L	18	33	32 kg / 70.4 lb	38 kg / 83.6 lb	780W×510D×260H	870W×600D×330H